


Fastrax Dome System



Model No. : HID2404SXXXX

- **4.9-inch Acrylic bubble**
- **Optional 360° continuous rotation**
- **Up to 240 programmable preset positions**
- **Optional Manual/Auto Night shot and slow shutter function enhances low light sensitivity**
- **High resolution Camera**
- **Optional Indoor/Outdoor Pendant mount**
- **Auto focus/Iris with Manual Override**
- **AC Line Lock (Remote Control)**
- **Quick Detachable (Hot Swap)**
- **Offset(Recalibration) of Preset Angle**
- **Data Up/Down load (Preset, Tour, Etc..)**
- **Privacy Zone Function**

MOUNT OPTIONS

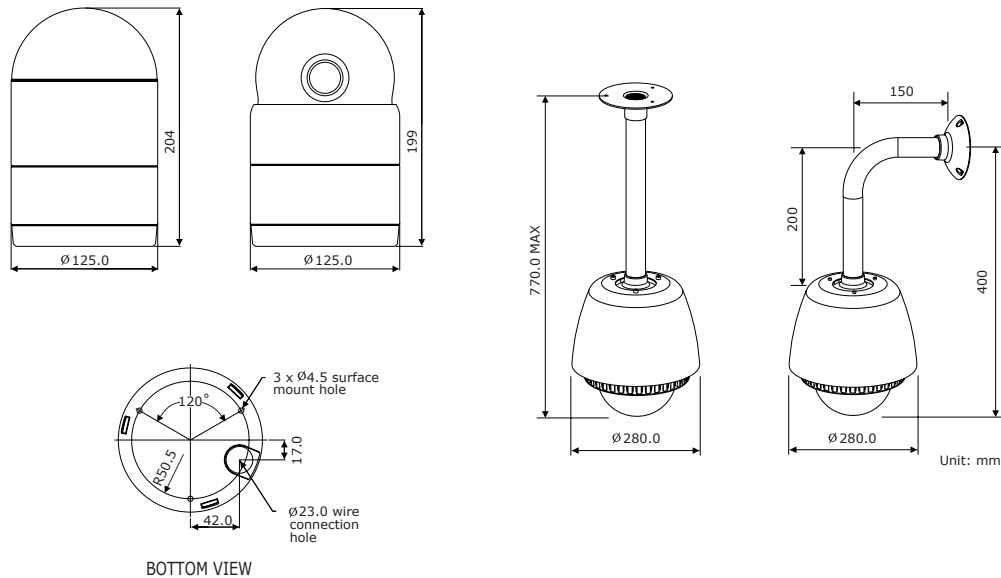

SPECIFICATIONS

MODEL	HID2404SL00N(P)	HID2404SL11N(P)	HID2404SM11N(P)	HID2404SH11N(P)
CAMERA/OPTICS				
Signal format	NTSC or PAL			
Image sensor	1/4 -inch CCD		1/4-inch EX-viewCCD	1/6-inch super HAD CCD
Focal length	F1.4 to 3.0 (f=4.1 ~ 73.8mm)			
Min. Illumination	2.0 lux (normal shutter)		0.7 lux (normal shutter)	3.0 lux (normal shutter)
			0.01 lux (1/4s with IR Cut Filter Removed)	
Zoom	Optical 18X, Digital 12X			Optical 25X, Digital 12X
Shutter speed	1/60 ~ 1/10000s		1/4 ~ 1/10000s	
FUNCTION				
Panning angle	0° ~ 359° (auto revers)		360° Continuous rotation	
Tilt angle	-4° ~ 94°			
Auto Scan	8 Auto scan			
Preset	240 Presets with individual dwell time			
Pattern	4 Patterns (record user control up to 240sec)			
Tour	8 Tours consist of 32 functions (preset, pattern, auto scan, tour)			
Speed	Preset tour 400° /sec Manual control speed 0.1 ~ 250° /sec			
Area Title	Divides 16 zones with 16 characters of title			
Alarm	NA		8 inputs (NC/NO), 4 relay outputs	